

IT-M3900B

Regenerative Power System



Your Power Testing Solution

IT-M3900B Regenerative power system



The IT-M3900 series combines four series of DC power supplies, bi-directional power supplies, regenerative power system and regenerative electronic load. It continues the ultra high power density design of M series, with a maximum power of 6kW, current of 510A and voltage up to 1500V in 1U, comfortable system scalability, and a small physical size could save extra space and fully meet the stringent requirements of various requests with the multi-functional, high energy-saving, high safety and high stability product design.

IT-M3900B regenerative power system feature two-in-one, which could use as a bidirectional DC power supply, also act as an independent regenerative load. One-button-switch between source and load mode, a unique and decisive feature for the user groups that works in different applications such as battery, energy storage, electric vehicle, Green energy and some ATE fields.

Application

Industrial power supply modules

Inverters, Emergency power supply modules, Bidirectional DC-DC, Rectifier

Electric Vehicles

BOBC, DC-DC Modules, Automotive Electronic Devices

Small/Medium Power Motors

Drones, Power tools, Electric Motorbikes

5G communication and data center

UPS, UPS inverter unit, HVDC power supply



Your Power Testing Solution

IT-M3900B regenerative power system

Voltage	Model	Current	Power	Current	Power	Size
10V	IT-M3901B-10-170	-120~170A	-1200~1700W	3~120A	12~1200W	1U
	IT-M3903B-10-340	-240~340A	-2400~3400W	4~240A	40~2400W	1U
	IT-M3905B-10-510	-360~510A	-3600~5100W	6~360A	60~3600W	1U
	IT-M3910B-10-1020	-720~1020A	-7200~10200W	12~720A	120~7200W	2U
32V	IT-M3902B-32-80	±80A	±2kW	80A	2kW	1U
	IT-M3904B-32-160	±160A	±4kW	160A	4kW	1U
	IT-M3906B-32-240	±240A	±6kW	240A	6kW	1U
	IT-M3912B-32-480	±480A	±12kW	480A	12kW	2U
80V	IT-M3902B-80-40	±40A	±2kW	40A	2kW	1U
	IT-M3904B-80-80	±80A	±4kW	80A	4kW	1U
	IT-M3906B-80-120	±120A	±6kW	120A	6kW	1U
	IT-M3912B-80-240	±240A	±12kW	240A	12kW	2U
300V	IT-M3902B-300-20	±20A	±2kW	20A	2kW	1U
	IT-M3904B-300-40	±40A	±4kW	40A	4kW	1U
	IT-M3906B-300-60	±60A	±6kW	60A	6kW	1U
	IT-M3912B-300-120	±120A	±12kW	120A	12kW	2U
500V	IT-M3902B-500-12	±12A	±2kW	12A	2kW	1U
	IT-M3904B-500-24	±24A	±4kW	24A	4kW	1U
	IT-M3906B-500-36	±36A	±6kW	36A	6kW	1U
	IT-M3912B-500-72	±72A	±12kW	72A	12kW	2U
800V	IT-M3902B-800-8	±8A	±2kW	8A	2kW	1U
	IT-M3904B-800-16	±16A	±4kW	16A	4kW	1U
	IT-M3906B-800-24	±24A	±6kW	24A	6kW	1U
	IT-M3912B-800-48	±48A	±12kW	48A	12kW	2U
1500V	IT-M3906B-1500-12	±12A	±6kW	12A	6kW	1U
	IT-M3912B-1500-24	±24A	±12kW	24A	12kW	2U

* The above specifications are subject to update without notice

Your Power Testing Solution

IT-M3900B regenerative power system

FEATURE

- 2 in 1 unit - a bidirectional power supply and a regenerative load
- One button switch between source and load on front panel
- Compact design, 1U@6kW, 2U@12kW
- Voltage range: 10~1500V
- Current range: -720A~1020A
- Power range: $\pm 12\text{kW}$
- Bidirectional energy flow between the DUT and the grid, current seamless switching
- Master/slave parallel connection - keep good performance while power extension*1
- Efficient power regeneration - reduce cost of electricity and cooling
- CC/CV priority
- Adjustable output impedance
- Battery charge and discharge test
- Battery simulation
- Partial pre-compliant with LV123, LV148, DIN40839, ISO-16750-2, SAEJ1113-11, LV124 and ISO21848 automotive testing standards*2
- Slope of voltage, current and power is settable
- Simulation of dynamic driving conditions, up to 10 million points
- 8 operation modes under Source mode: CC/CV/CW/CR/C-C+CV/CV+CR/CR+CC/CC+CV+CW+CR
- Multiple protection: OVP / $\pm\text{OCP}$ / $\pm\text{OPP}$ / OTP / voltage transient drop protection/anti-islanding/power grid detection
- Built-in USB/CAN/LAN/digital IO interfaces, Optional GPIB/Analog&RS232


*1 If 1U models>16, 2U models>8, pls. contact ITECH.

*2 Not available for 10V models

One button switch, bidirectional and regenerative



Different from other bidirectional power supplies, IT-M3900B series is a regenerative power system which combines two devices into a 1U unit. It is both a bidirectional DC power supply and also a regenerative DC electronic load. You can switch between Source and Load with one button on the front panel. IT-M3900B not only saves space and equipment purchasing cost for you, but also enables you to connect DUT easily.

It can switch seamlessly between source and sink mode fast and continuously, which avoids voltage or current overshoot effectively. IT-M3900B can be well applied to battery test, cell packaging equipment test, battery protection board test, etc.

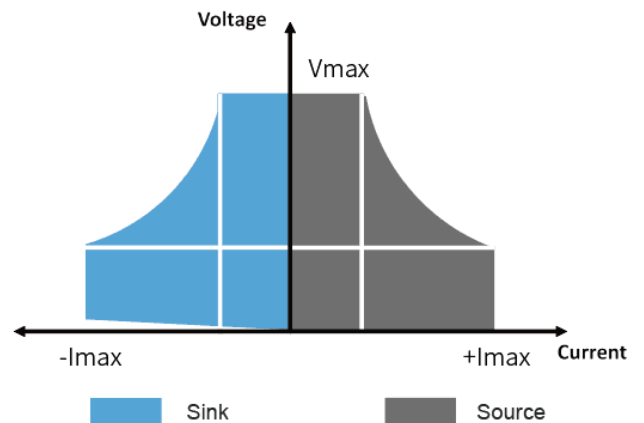

Wide range output

There are 25 models included in IT-M3900B series. The output voltage ranges from 10V to 1500V and the maximum output current of a single unit can reach 1020A. The wide-range output design provides more voltage and current combinations than conventional fixed-range output DC power supplies, which is more flexible. Just a single unit can cover a wide range of applications which makes it easy to build power systems and largely save room for you at the same time.

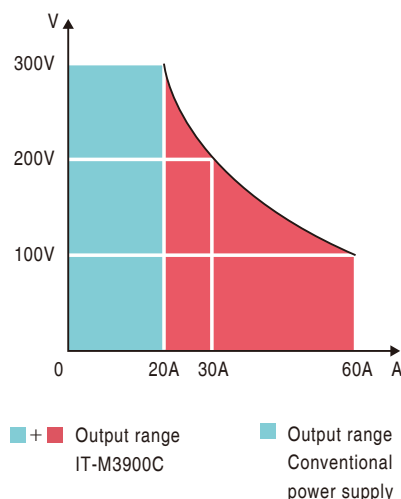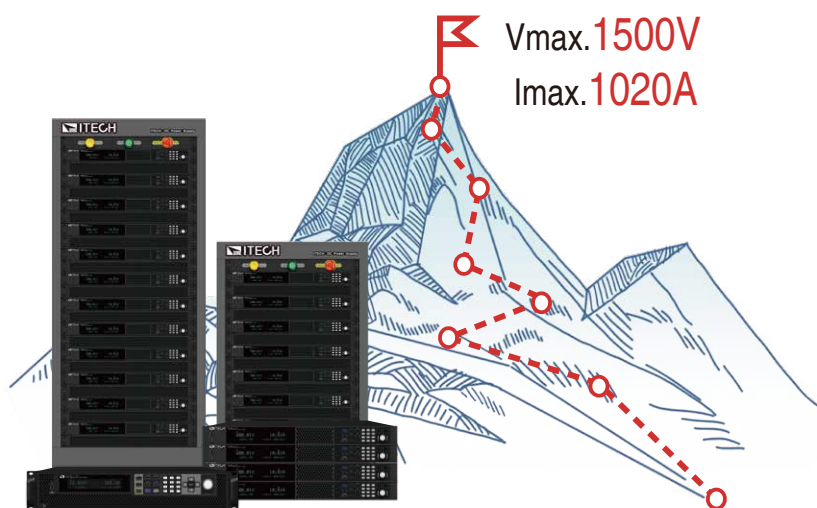

CC & CV priority


CV & CC priority helps customers effectively and flexibly solve their various tough problems in test applications request for high speed and no over-shoot power supplies. Customers can select CV or CC priority to adjust the speed of the loop circuit, to decide output with the high-speed voltage or current with no overshoot. It is applicable for high-power integrated circuit test, charging/ discharging test and the transient simulation/ characteristic test of automotive electronics.

Battery charge/discharge Testing

IT-M3900B series are with unique bidirectional design, variable output impedance, and four working modes of CC/CV/CP/CR under load mode, so it can simulate battery charging and discharging characteristics, set various testing conditions and process testing data, so as to be applicable for charging and discharging testing for various kinds of portable batteries. IT-M3900B series are with unique bidirectional design, variable output impedance, and four working modes of CC/CV/CP/CR under load mode, so it can simulate battery charging and discharging characteristics, set various testing conditions and process testing data, so as to be applicable for charging and discharging testing for various kinds of portable batteries.

With optional ITS5300 battery testing software,
it can do the below testing items:

- Road conditions simulation
- Charging & discharging characteristics testing
- Cycle life testing
- Consistency testing
- DCIR testing
- Temperature testing
- Capacity testing
- Life testing
- Reliability testing
- Overcharge/over discharge endurance testing

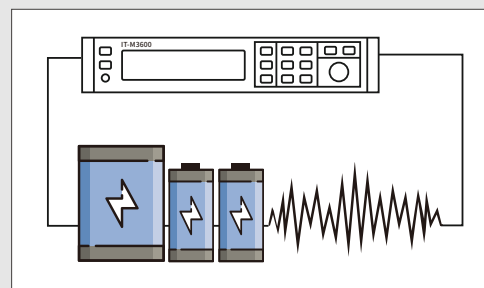

Your Power Testing Solution

IT-M3900B regenerative power system

Power regenerative and eco-friendly

With the power regeneration function, IT-M3900B can feed back up to 95% power instead of consuming it as heat. It not only save your cost of electricity, HVAC and cooling infrastructure, but also help to reduce carbon emission and impact on the environment. In addition, IT-M3900B has the function of automatic grid detection, which can detect phase voltage and frequency in real time and synchronizes with the grid to make energy regeneration automatic and safe.

Production facility : 24Hr/day x 7 work days x 52 weeks

Power	Electricity cost saved (appr. USD/year)	CO2 emission reduced (appr. ton/year)
6 kW	6,971	50
12 kW	13,943	99
36 kW	41,828	298
96 kW	111,541	794


R&D lab : 8Hr/day x 5 work days x 52 weeks

Power	Electricity cost saved (appr. USD/year)	CO2 emission reduced (appr. ton/year)
6kW	1,747	12
12 kW	3,494	24
36 kW	10,483	71
96 kW	27,955	189

* The data is based on :


1. approximate electricity price 0.14USD/kWh for industry facility
2. 1kWh power consumption \approx 0.997 CO emission

* The extra cost of air conditioning is not included.

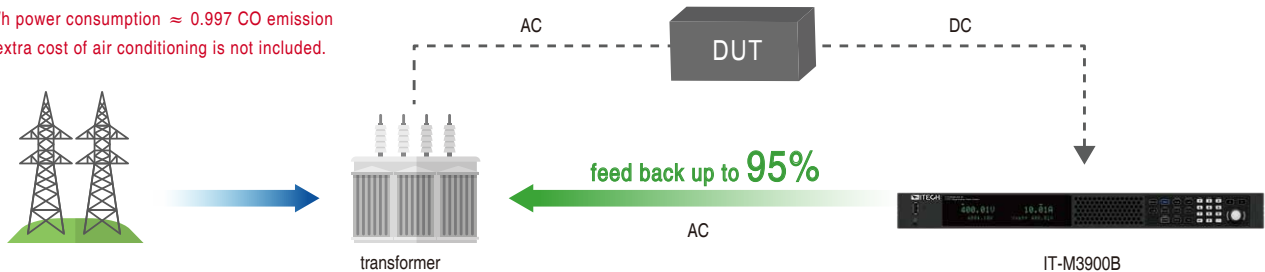

Pre-compliant with multiple standards for EV component testing

Power transients often happen during vehicle start-up and driving. To make sure that the automotive electronic components can withstand it, it's necessary to simulate the worst conditions during the test. IT-M3900B has built in partial voltage curves of pre-compliant standard, including LV123, LV148, DIN40839, ISO-16750-2, SAEJ1113-11, LV124 and ISO21848. Users can easily recall various waveforms directly. You don't need to program by yourself or purchase any additional software.

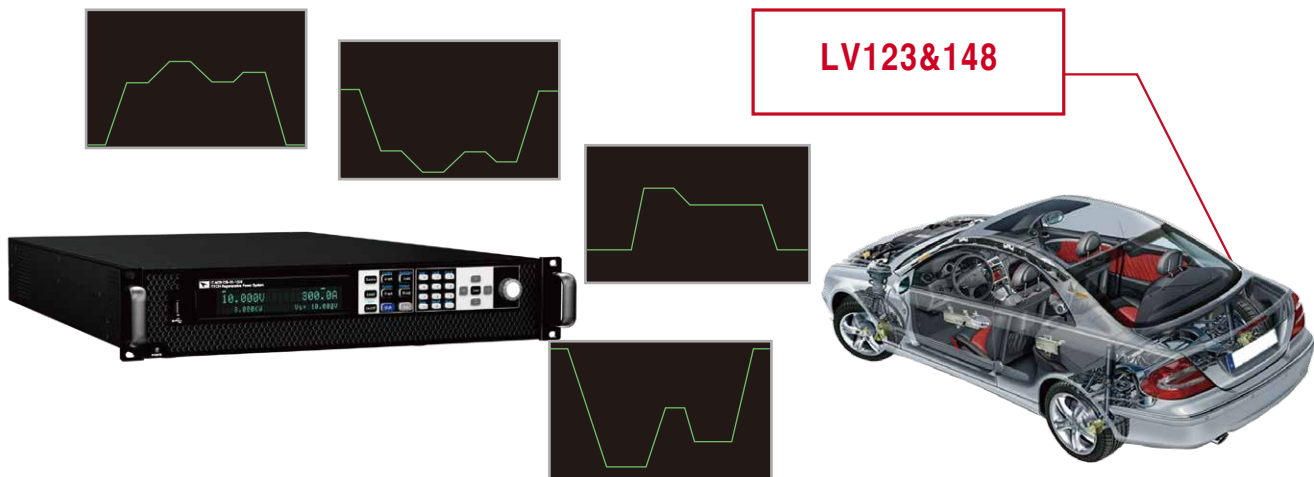

Battery simulation function





IT-M3900B unique bidirectional design and variable output impedance makes it easy for the users to set voltage/capacity/internal resistance/SOC quickly to define battery matrix quickly from the front panel, to simulate the charge/discharge characteristics of battery and assist with other tests. ITECH provides optional BSS2000 battery simulation software, then users can self-define the battery curve by setting common parameters, also can set battery initial capacity to verify the DUT characteristics under different battery status. Meanwhile, BSS2000 supports importing matlab battery matrix or CSV. file with battery charging and discharging curve, so as to simulate real battery charge and discharge characteristics.





BSS2000 battery simulation software interface

Multiple operation modes

IT-M3900B provide CC/CV/CW/CR modes under source/load mode.





IT-M3900B also provide CC+CR/CV+CR/CV+CC/CC+CV+CW+CR four complex modes under Load mode, adapt to multiple applications.



CC+CR mode can be applied to OBC feature test of voltage limit, feature test of current limit, constant voltage accuracy test, constant current accuracy test, to prevent over current protection.

CV+CR mode can be applied to simulate LED light, test LED power, LED current ripple parameters.

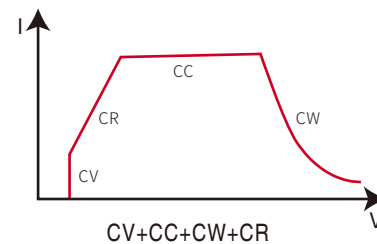


CV+CC mode can be applied to simulate battery, test charging station or car charger, the maximum loading current is limited when the CV is working.

CV+CC+CW+CR mode can be applied to test lithium-ion battery charger, to gain complete V-I charging curve. In addition, when protection circuit of DUT is damaged, it can auto switch to avoid damage.

Your Power Testing Solution

IT-M3900B regenerative power system

Multiple interfaces

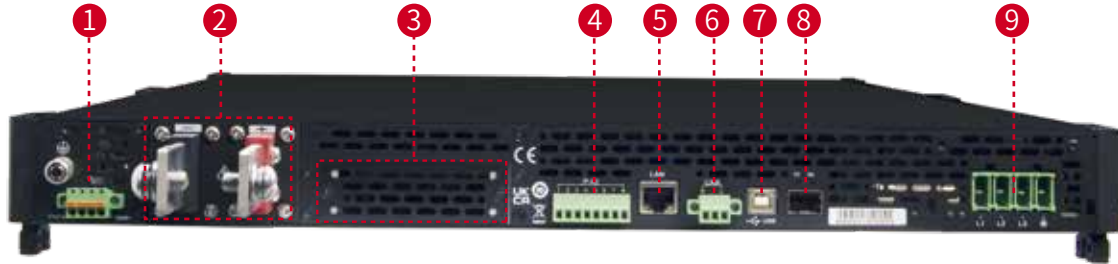

1 Sense terminals (Vs+, Vs-)



2 DC output terminals of the power supply



3 Interface for optional accessories



4 Digital I/O interface: P-IO



5 LAN Communication Interface



6 CAN Communication Interface



7 USB Communication Interface



8 Communication interface of outer ring optical fiber (TX and RX)



9 terminals (L1, L2, L3, and PE)



Optional Accessories

Category	Model	Specification	Description
Parallel kit	IT-E510-15U	15U unit, grey	800mm X 550mm X907.64mm
	IT-E511-15U	15U unit, black	800mm X 550mm X907.64mm
	IT-E510-27U	27U unit, grey	800mm X 600mmX 1441.41mm
	IT-E511-27U	27U unit, black	800mm X 600mmX 1441.41mm
	IT-E510-37U	37U unit, grey	800mm X 600mm X 1885.91mm
	IT-E511-37U	37U unit, black	800mm X 600mm X 1885.91mm
	IT-E168	Optical fiber cable kit	Used for parallel connection between the units in a cabinet
IT-E155A/B/C	Rack mount kits	Cabinet rack mount installation	
Functional Module	IT-E165A-250 *1	Anti-reverse protection unit 750V/250A	Avoid reverse connection
	IT-E165A-400 *1	Anti-reverse protection unit 750V/400A	Avoid reverse connection
	IT-E165A-500 *1	Anti-reverse protection unit 900V/400A	Avoid reverse connection
	IT-E165B *2	Anti-EMF unit 1200V/200A	Avoid current back flow
Other accessories	IT-E258-15U	5m power cord for 15U unit, CN standard	AC input power cord
	IT-E258-27U	5m power cord for 27U unit, CN standard	AC input power cord
	IT-E258-37U	5m power cord for 37U unit, CN standard	AC input power cord
	IT-E176	GPIB communication interface	
	IT-E177	RS232&analog communication card	



IT-E511-15U

*1 The voltage/current of the DUT must be within the IT-E165A rated range

*2 The voltage/current of the DUT must be within the IT-E165B rated range

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3905B-10-510			
Power supply parameters		Load parameters	
Rated value (0 °C-50 °C)	Voltage	0~10V	Rated value (0 °C-50 °C)
	Current	-360A~510A	
	Power	-3600W~5100W	
	Series IR(CV priority) Load resistance (CC priority mode)	0~0.01Ω 0.003Ω~10Ω	
Setup Resolution	Voltage	0.001V	Setup Resolution
	Current	0.1A	
	Power	1W	
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.001Ω	
Readback Resolution	Voltage	0.001V	Readback Resolution
	Current	0.1A	
	Power	1W	
Setup Accuracy	Voltage	≤0.05% + 0.05%FS	Setup Accuracy
	Current	≤0.1% + 0.1%FS	
	Power	≤0.5% + 0.5%FS	
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: $1/(1/R_{set}+(1/R_{set})^{0.1+0.008})$ Min.: $1/(1/R_{set}-(1/R_{set})^{0.1-0.008})$	
Readback Accuracy	Voltage	≤0.05% + 0.05%FS	Readback Accuracy
	Current	≤0.1% + 0.1%FS	
	Power	≤0.5% + 0.5%FS	
Voltage Ripple ^{*2}	≤65mVpp(Peak value)/≤10mV(RMS)		Current Slew Rate
Rise Time (no load)/(full load)	Voltage	≤50ms(no load)/≤100ms(full load)	Power Regulation Rate
Fall Time (no load)/(full load)	Voltage	≤100ms(no load)/≤50ms(full load)	
Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	Load Regulation Rate
	Current	≤0.03% + 0.03%FS	
Load Regulation Rate	Voltage	0.0035%*1 + 0.05%FS	Short Circuit Test
	Current	≤0.05% + 0.05%FS	
Input Protection Scope	OCP	-375A or 525A	Input Protection Scope
	OVP	10.5V	
	OPP	-3672W or 5202W	
Remote Sense Compensation Voltage	≤2V		Remote Sense Compensation Voltage
AC Input ^{*3}	Voltage	3φ 200V~480V	
	Frequency	1φ 100V~240V 50/60Hz	
Max. AC Apparent Power	5.55kVA		
Max. AC Current	12.5Aac		
Max. Efficiency	89%		
Power Factor	0.99		
DC Component	≤0.2A		
Current Harmonic	≤3%		
Working Temperature	0~40°C		
Storage Temperature	-10°C~70°C		
Programming Response Time	0.1ms		
Withstand Voltage (DC to ground)	200Vdc/1min		
Withstand Voltage (AC to ground)	3000Vdc/1min		
Withstand Voltage(AC to DC)	2250Vdc/1min		
Isolation Voltage	200Vdc		
Cooling Mode	Air cooling		

*1 Resistance accuracy -- current / voltage not less than 10%FS

*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:

Three-phase input, line voltage 200Vac, the power is: $P=200Vac*12.5Aac*1.732=4330VA$

Single-phase input, phase voltage 200Vac, the power is: $P=200Vac*12.5Aac=2500VA$

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-32-240					
Power supply parameters			Load parameters		
Rated value (0 °C-50 °C)	Voltage	0 ~ 32V	Rated value (0 °C-50 °C)	Voltage	0 ~ 32V
	Current	-240A ~ 240A		Current	0 ~ 240A
	Power	-6000W ~ 6000W		Power	0 ~ 6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0 ~ 0.06Ω 0.005Ω ~ 400Ω		Resistance	0.005Ω ~ 400Ω
Setup Resolution	Min.operation voltage	0.5V at 240A	Setup Resolution	Input leak current	0.01A
	Voltage	0.001V		Voltage	0.001V
	Current	0.01A		Current	0.01A
	Power	1W		Power	1W
Readback Resolution	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.001Ω	Readback Resolution	Resistance	0.001Ω
	Voltage	0.001V		Voltage	0.001V
	Current	0.01A		Current	0.01A
	Power	1W		Power	1W
Setup Accuracy	Voltage	≤ 0.05% + 0.05%FS	Setup Accuracy	Voltage	≤ 0.05% + 0.05%FS
	Current	≤ 0.1% + 0.1%FS		Current	≤ 0.1% + 0.1%FS
	Power	≤ 0.5% + 0.5%FS		Power	≤ 0.5% + 0.5%FS
	Series IR(CV priority) Load resistance (CC priority mode)	≤ 1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0005) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0005)		Resistance*1	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0005) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0005)
Readback Accuracy	Voltage	≤ 0.05% + 0.05%FS	Readback Accuracy	Voltage	≤ 0.05% + 0.05%FS
	Current	≤ 0.1% + 0.1%FS		Current	≤ 0.1% + 0.1%FS
	Power	≤ 0.5% + 0.5%FS		Power	≤ 0.5% + 0.5%FS
Voltage Ripple*2	≤ 80mVpp(Peak value)/ ≤ 30mV(RMS)		Current Slew Rate	Rising rate	240A/ms
Rise Time (no load)/(full load)	Voltage	≤ 30ms(no load)/ ≤ 100ms(full load)	Power Regulation Rate	Descent rate	240A/ms
Fall Time (no load)/(full load)	Voltage	≤ 60ms(no load)/ ≤ 30ms(full load)		Voltage	≤ 0.01% + 0.01%FS
Power Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	Load Regulation Rate	Current	≤ 0.03% + 0.03%FS
	Current	≤ 0.03% + 0.03%FS		Voltage	≤ 0.02% + 0.02%FS
Load Regulation Rate	Voltage	≤ 0.02% + 0.02%FS	Short Circuit Test	Current	≤ 0.05% + 0.05%FS
	Current	≤ 0.05% + 0.05%FS		Current	244.8A
Input Protection Scope	OCP	-247.2A or 247.2A	Input Protection Scope	OCP	247.2A
	OVP	33V		OVP	35V
	OPP	-6120W or 6120W		OPP	6120W
Remote Sense Compensation Voltage	≤ 10V		Remote Sense Compensation Voltage	≤ 10V	
AC Input*3	Voltage	3φ 200V ~ 480V 1φ 100V ~ 240V			
	Frequency	50/60Hz			
Max. AC Apparent Power	6.5kVA				
Max. AC Current	12.5Aac				
Max. Efficiency	90%				
Power Factor	0.99				
DC Component	≤ 0.2A				
Current Harmonic	≤ 3%				
Working Temperature	0 ~ 40 °C				
Storage Temperature	-10 °C ~ 70 °C				
Programming Response Time	0.1ms				
Withstand Voltage (DC to ground)	200Vdc/1min				
Withstand Voltage (AC to ground)	3000Vdc/1min				
Withstand Voltage(AC to DC)	2250Vdc/1min				
Isolation Voltage	200Vdc				
Cooling Mode	Air cooling				

*1 Resistance accuracy -- current / voltage not less than 10%FS

*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:

Three-phase input, line voltage 200Vac, the power is: P=200Vac*12.5Aac*1.732=4330VA

Single-phase input, phase voltage 200Vac, the power is: P=200Vac*12.5Aac=2500VA

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-80-120			
Power supply parameters		Load parameters	
Rated value (0 °C-50 °C)	Voltage	0~80V	Rated value (0 °C-50 °C)
	Current	-120A~120A	
	Power	-6000W~6000W	
	Series IR(CV priority) Load resistance (CC priority mode)	0~0.3Ω 0.01Ω~800Ω	
Setup Resolution	Voltage	0.001V	Setup Resolution
	Current	0.01A	
	Power	1W	
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.001Ω	
Readback Resolution	Voltage	0.001V	Readback Resolution
	Current	0.01A	
	Power	1W	
Setup Accuracy	Voltage	≤ 0.03% + 0.03%FS	Setup Accuracy
	Current	≤ 0.1% + 0.1%FS	
	Power	≤ 0.5% + 0.5%FS	
	Series IR(CV priority) Load resistance (CC priority mode)	≤ 1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0005) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0005)	
Readback Accuracy	Voltage	≤ 0.03% + 0.03%FS	Readback Accuracy
	Current	≤ 0.1% + 0.1%FS	
	Power	≤ 0.5% + 0.5%FS	
Voltage Ripple ^{*2}	≤ 200mVpp(Peak value)/ ≤ 80mV(RMS)		Current Slew Rate
Rise Time (no load)/(full load)	Voltage	≤ 15ms(no load)/ ≤ 30ms(full load)	Power Regulation Rate
Fall Time (no load)/(full load)	Voltage	≤ 30ms(no load)/ ≤ 15ms(full load)	
Power Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	Load Regulation Rate
	Current	≤ 0.03% + 0.03%FS	
Load Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	Short Circuit Test
	Current	≤ 0.05% + 0.05%FS	
Input Protection Scope	OCP	-126A or 126A	Input Protection Scope
	OVP	82V	
	OPP	-6120W or 6120W	
Remote Sense Compensation Voltage	≤ 8V		Remote Sense Compensation Voltage
AC Input ^{*3}	Voltage	3φ 200V~480V	
	Frequency	1φ 100V~240V 50/60Hz	
Max. AC Apparent Power	6.5kVA		
Max. AC Current	12.5Aac		
Max. Efficiency	92%		
Power Factor	0.99		
DC Component	≤ 0.2A		
Current Harmonic	≤ 3%		
Working Temperature	0~40 °C		
Storage Temperature	-10 °C ~ 70 °C		
Programming Response Time	0.1ms		
Withstand Voltage (DC to ground)	500Vdc/1min		
Withstand Voltage (AC to ground)	3000Vdc/1min		
Withstand Voltage(AC to DC)	2250Vdc/1min		
Isolation Voltage	300Vdc		
Cooling Mode	Air cooling		

*1 Resistance accuracy -- current / voltage not less than 10%FS

*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:

Three-phase input, line voltage 200Vac, the power is: $P=200Vac*12.5Aac*1.732=4330VA$

Single-phase input, phase voltage 200Vac, the power is: $P=200Vac*12.5Aac=2500VA$

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-300-60					
Power supply parameters			Load parameters		
Rated value (0 °C-50 °C)	Voltage	0~300V	Rated value (0 °C-50 °C)	Voltage	0~300V
	Current	-60A~60A		Current	0~60A
	Power	-6000W~6000W		Power	0~6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0~0.4Ω 0.05Ω~3000Ω		Resistance	0.05Ω~3000Ω
Setup Resolution	Min.operation voltage	3V at 60A	Setup Resolution	Input leak current	0.01A
	Voltage	0.01V		Voltage	0.001V
	Current	0.001A		Current	0.01A
	Power	1W		Power	1W
Readback Resolution	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.001Ω	Readback Resolution	Resistance	0.001Ω
	Voltage	0.01V		Voltage	0.001V
	Current	0.001A		Current	0.01A
	Power	1W		Power	1W
Setup Accuracy	Voltage	≤0.03% + 0.03%FS	Setup Accuracy	Voltage	≤0.03% + 0.03%FS
	Current	≤0.1% + 0.1%FS		Current	≤0.1% + 0.1%FS
	Power	≤0.5% + 0.5%FS		Power	≤0.5% + 0.5%FS
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)		Resistance*1	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)
Readback Accuracy	Voltage	≤0.03% + 0.03%FS	Readback Accuracy	Voltage	≤0.03% + 0.03%FS
	Current	≤0.1% + 0.1%FS		Current	≤0.1% + 0.1%FS
	Power	≤0.5% + 0.5%FS		Power	≤0.5% + 0.5%FS
Voltage Ripple*2	≤300mVpp(Peak value)/≤60mV(RMS)		Current Slew Rate	Rising rate	60A/ms
Rise Time (no load)/(full load)	Voltage	≤30ms(no load)/≤60ms(full load)	Power Regulation Rate	Descent rate	60A/ms
Fall Time (no load)/(full load)	Voltage	≤30ms(no load)/≤15ms(full load)		Voltage	≤0.01% + 0.01%FS
Power Regulation Rate	Current	≤0.03% + 0.03%FS	Load Regulation Rate	Current	≤0.03% + 0.03%FS
	Voltage	≤0.01% + 0.01%FS		Voltage	≤0.01% + 0.01%FS
Load Regulation Rate	Current	≤0.05% + 0.05%FS	Short Circuit Test	Current	≤0.05% + 0.05%FS
	Voltage	≤0.01% + 0.01%FS		Current	61.2A
Input Protection Scope	OCP	-63A or 63A	Input Protection Scope	OCP	63A
	OVP	303V		OVP	330V
	OPP	-6120W or 6120W		OPP	6120W
Remote Sense Compensation Voltage	≤10V		Remote Sense Compensation Voltage	≤10V	
AC Input*3	Voltage	3φ 200V~480V 1φ 100V~240V			
	Frequency	50/60Hz			
Max. AC Apparent Power	6.5kVA				
Max. AC Current	12.5Aac				
Max. Efficiency	93%				
Power Factor	0.99				
DC Component	≤0.2A				
Current Harmonic	≤3%				
Working Temperature	0~40 °C				
Storage Temperature	-10 °C ~ 70 °C				
Programming Response Time	0.1ms				
Withstand Voltage (DC to ground)	2000Vdc/1min				
Withstand Voltage (AC to ground)	3000Vdc/1min				
Withstand Voltage(AC to DC)	2250Vdc/1min				
Isolation Voltage	300Vdc				
Cooling Mode	Air cooling				

*1 Resistance accuracy -- current / voltage not less than 10%FS

*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:

Three-phase input, line voltage 200Vac, the power is: P=200Vac*12.5Aac*1.732=4330VA

Single-phase input, phase voltage 200Vac, the power is: P=200Vac*12.5Aac=2500VA

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3906B-500-36			
Power supply parameters		Load parameters	
Rated value (0 °C-50 °C)	Voltage	0 ~ 500V	Rated value (0 °C-50 °C)
	Current	-36A ~ 36A	
	Power	-6000W ~ 6000W	
	Series IR(CV priority) Load resistance (CC priority mode)	0 ~ 0.7Ω 0.1Ω ~ 5000Ω	
Setup Resolution	Voltage	0.01V	Setup Resolution
	Current	0.001A	
	Power	1W	
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.01Ω	
Readback Resolution	Voltage	0.01V	Readback Resolution
	Current	0.001A	
	Power	1W	
Setup Accuracy	Voltage	≤ 0.03% + 0.03%FS	Setup Accuracy
	Current	≤ 0.1% + 0.1%FS	
	Power	≤ 0.5% + 0.5%FS	
	Series IR(CV priority) Load resistance (CC priority mode)	≤ 1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)	
Readback Accuracy	Voltage	≤ 0.03% + 0.03%FS	Readback Accuracy
	Current	≤ 0.1% + 0.1%FS	
	Power	≤ 0.5% + 0.5%FS	
Voltage Ripple*2	≤ 500mVpp(Peak value)/ ≤ 100mV(RMS)		Current Slew Rate
Rise Time (no load)/(full load)	≤ 30ms(no load)/ ≤ 60ms(full load)		
Fall Time (no load)/(full load)	≤ 30ms(no load)/ ≤ 15ms(full load)		Power Regulation Rate
Power Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	
	Current	≤ 0.03% + 0.03%FS	
Load Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	Load Regulation Rate
	Current	≤ 0.05% + 0.05%FS	
Input Protection Scope	OCP	-37.5A or 37.5A	Short Circuit Test
	OVP	505V	
	OPP	-6120W or 6120W	
Remote Sense Compensation Voltage	≤ 10V		Remote Sense Compensation Voltage
AC Input*3	Voltage	3φ 200V ~ 480V	
	Frequency	1φ 100V ~ 240V 50/60Hz	
Max. AC Apparent Power	6.5kVA		
Max. AC Current	12.5Aac		
Max. Efficiency	93%		
Power Factor	0.99		
DC Component	≤ 0.2A		
Current Harmonic	≤ 3%		
Working Temperature	0 ~ 40 °C		
Storage Temperature	-10 °C ~ 70 °C		
Programming Response Time	0.1ms		
Withstand Voltage (DC to ground)	2000Vdc/1min		
Withstand Voltage (AC to ground)	3000Vdc/1min		
Withstand Voltage(AC to DC)	2250Vdc/1min		
Isolation Voltage	500Vdc		
Cooling Mode	Air cooling		

*1 Resistance accuracy -- current / voltage not less than 10%FS

*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:

Three-phase input, line voltage 200Vac, the power is: P=200Vac*12.5Aac*1.732=4330VA

Single-phase input, phase voltage 200Vac, the power is: P=200Vac*12.5Aac=2500VA

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification

IT-M3900B-800-24					
Power supply parameters			Load parameters		
Rated value (0 °C-50 °C)	Voltage	0~800V	Rated value (0 °C-50 °C)	Voltage	0~800V
	Current	-24A~24A		Current	0~24A
	Power	-6000W~6000W		Power	0~6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0~1Ω 0.15Ω~7500Ω		Resistance	0.15Ω~7500Ω
Setup Resolution	Voltage	0.01V	Setup Resolution	Min.operation voltage	4V at 24A
	Current	0.001A		Input leak current	0.003A
	Power	1W		Voltage	0.01V
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.01Ω		Current	0.001A
Readback Resolution	Voltage	0.01V	Readback Resolution	Power	1W
	Current	0.001A		Resistance	0.01Ω
	Power	1W		Voltage	0.01V
Setup Accuracy	Voltage	≤0.03% + 0.03%FS	Setup Accuracy	Current	0.001A
	Current	≤0.1% + 0.1%FS		Power	1W
	Power	≤0.5% + 0.5%FS		Resistance	0.01Ω
	Series IR(CV priority) Load resistance (CC priority mode)	≤1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)		Resistance*1	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)
Readback Accuracy	Voltage	≤0.03% + 0.03%FS	Readback Accuracy	Voltage	≤0.03% + 0.03%FS
	Current	≤0.1% + 0.1%FS		Current	≤0.1% + 0.1%FS
	Power	≤0.5% + 0.5%FS		Power	≤0.5% + 0.5%FS
Voltage Ripple*2	≤1000mVpp(Peak value)/≤160mV(RMS)		Current Slew Rate	Rising rate	24A/ms
Rise Time (no load)/(full load)	Voltage	≤30ms(no load)/≤60ms(full load)	Power Regulation Rate	Descent rate	24A/ms
Fall Time (no load)/(full load)	Voltage	≤30ms(no load)/≤15ms(full load)		Voltage	≤0.01% + 0.01%FS
Power Regulation Rate	Voltage	≤0.01% + 0.01%FS	Load Regulation Rate	Current	≤0.03% + 0.03%FS
	Current	≤0.03% + 0.03%FS		Voltage	≤0.01% + 0.01%FS
Load Regulation Rate	Voltage	≤0.01% + 0.01%FS	Short Circuit Test	Current	≤0.05% + 0.05%FS
	Current	≤0.05% + 0.05%FS		Current	24.48A
Input Protection Scope	OCP	-25.2A or 25.2A	Input Protection Scope	OCP	25.2A
	OVP	808V		OVP	835V
	OPP	-6120W or 6120W		OPP	6120W
Remote Sense Compensation Voltage	≤16V		Remote Sense Compensation Voltage	≤16V	
AC Input*3	Voltage	3φ 200V~480V 1φ 100V~240V			
	Frequency	50/60Hz			
Max. AC Apparent Power	6.5kVA				
Max. AC Current	12.5Aac				
Max. Efficiency	93%				
Power Factor	0.99				
DC Component	≤0.2A				
Current Harmonic	≤3%				
Working Temperature	0~40 °C				
Storage Temperature	-10 °C ~ 70 °C				
Programming Response Time	0.1ms				
Withstand Voltage (DC to ground)	2000Vdc/1min				
Withstand Voltage (AC to ground)	3000Vdc/1min				
Withstand Voltage(AC to DC)	2250Vdc/1min				
Isolation Voltage	800Vdc				
Cooling Mode	Air cooling				

*1 Resistance accuracy -- current / voltage not less than 10%FS
*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:
Three-phase input, line voltage 200Vac, the power is: P=200Vac*12.5Aac*1.732=4330VA
Single-phase input, phase voltage 200Vac, the power is: P=200Vac*12.5Aac=2500VA

* This information is subject to change without notice.

Your Power Testing Solution

IT-M3900B regenerative power system

Specification



IT-M3906B-1500-12

Power supply parameters		Load parameters			
Rated value (0 °C-50 °C)	Voltage	0 ~ 1500V	Rated value (0 °C-50 °C)	Voltage	0 ~ 1500V
	Current	-12A ~ 12A		Current	0 ~ 12A
	Power	-6000W ~ 6000W		Power	0 ~ 6000W
	Series IR(CV priority) Load resistance (CC priority mode)	0 ~ 1Ω 0.5Ω ~ 7500Ω		Resistance	0.5Ω ~ 7500Ω
Setup Resolution	Voltage	0.01V	Setup Resolution	Min.operation voltage	7.5V at 12A
	Current	0.001A		Input leak current	0.003A
	Power	1W		Voltage	0.01V
	Series IR(CV priority) Load resistance (CC priority mode)	0.001Ω 0.01Ω		Current	0.001A
Readback Resolution	Voltage	0.01V	Readback Resolution	Power	1W
	Current	0.001A		Resistance	0.01Ω
	Power	1W		Voltage	0.01V
Setup Accuracy	Voltage	≤ 0.03% + 0.03%FS	Setup Accuracy	Current	0.001A
	Current	≤ 0.1% + 0.1%FS		Power	1W
	Power	≤ 0.5% + 0.5%FS		Resistance ¹	Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)
	Series IR(CV priority) Load resistance (CC priority mode)	≤ 1%FS Max.: 1/(1/Rset+(1/Rset)*0.05+0.0001) Min.: 1/(1/Rset-(1/Rset)*0.05-0.0001)		Voltage	≤ 0.03% + 0.03%FS
Readback Accuracy	Voltage	≤ 0.03% + 0.03%FS	Readback Accuracy	Current	≤ 0.1% + 0.1%FS
	Current	≤ 0.1% + 0.1%FS		Power	≤ 0.5% + 0.5%FS
	Power	≤ 0.5% + 0.5%FS		Rising rate	12A/ms
Voltage Ripple ²	≤ 1500mVpp(Peak value)/ ≤ 300mV(RMS)		Descent rate	12A/ms	
Rise Time (no load)/(full load)	Voltage	≤ 30ms(no load)/ ≤ 60ms(full load)	Power Regulation Rate	Voltage	≤ 0.01% + 0.01%FS
Fall Time (no load)/(full load)	Voltage	≤ 30ms(no load)/ ≤ 15ms(full load)		Current	≤ 0.03% + 0.03%FS
Power Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	Load Regulation Rate	Voltage	≤ 0.01% + 0.01%FS
	Current	≤ 0.03% + 0.03%FS		Current	≤ 0.05% + 0.05%FS
Load Regulation Rate	Voltage	≤ 0.01% + 0.01%FS	Short Circuit Test	Current	12.24A
	Current	≤ 0.05% + 0.05%FS		OCP	12.5A
Input Protection Scope	OCP	-12.5A or 12.5A	Input Protection Scope	OVP	1590V
	OVP	1515V		OPP	6120W
	OPP	-6120W or 6120W		Remote Sense Compensation Voltage	≤ 30V
Remote Sense Compensation Voltage	≤ 30V				
AC Input ³	Voltage	3φ 200V ~ 480V			
	Frequency	1φ 100V ~ 240V			
Max. AC Apparent Power			50/60Hz		
Max. AC Current			6.5kVA		
Max. Efficiency			12.5Aac		
Power Factor			93%		
DC Component			0.99		
Current Harmonic			≤ 0.2A		
Working Temperature			≤ 3%		
Storage Temperature			0 ~ 40 °C		
Programming Response Time			-10 °C ~ 70 °C		
Withstand Voltage (DC to ground)			0.1ms		
Withstand Voltage (AC to ground)			2000Vdc/1min		
Withstand Voltage(AC to DC)			3000Vdc/1min		
Isolation Voltage			2250Vdc/1min		
Cooling Mode			1500Vdc		
			Air cooling		

*1 Resistance accuracy -- current / voltage not less than 10%FS
*2 The ripple is got under three-phase AC input

*3 The AC will be limited to 12.5Aac. When the AC input is low, power will be limited. E.g:
Three-phase input, line voltage 200Vac, the power is: P=200Vac*12.5Aac*1.732=4330VA
Single-phase input, phase voltage 200Vac, the power is: P=200Vac*12.5Aac=2500VA

* This information is subject to change without notice.

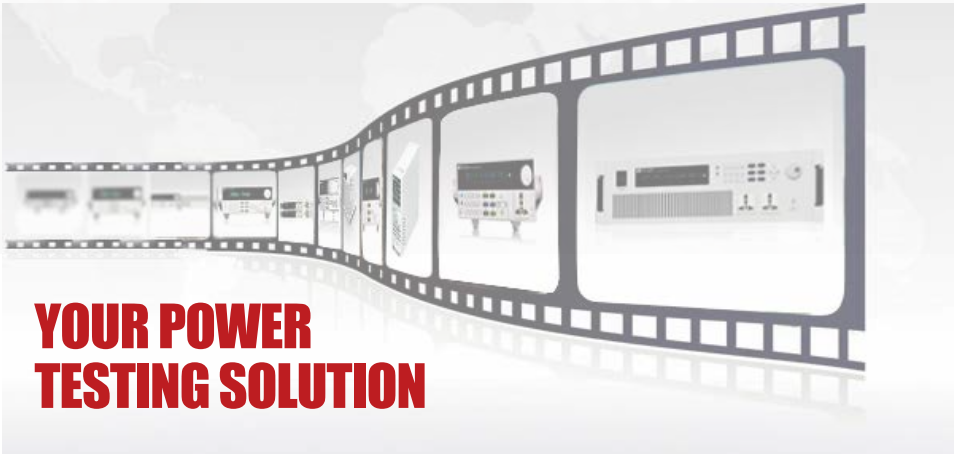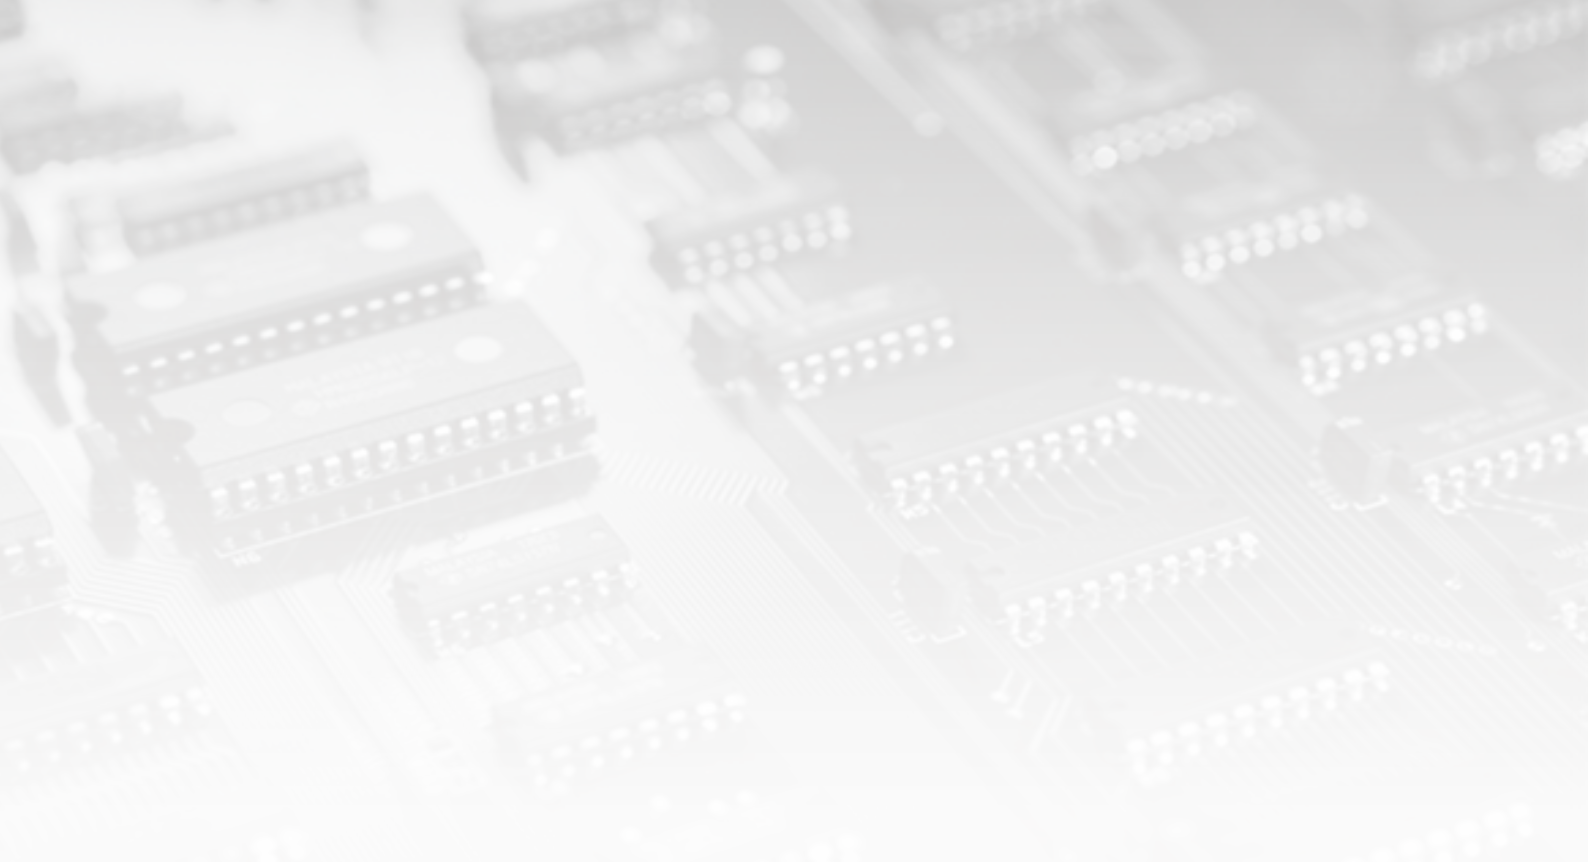

This information is subject to change without notice. For more information, please contact ITECH.

Taipei

Add: No.918, Zhongzheng Rd., Zhonghe Dist., New Taipei City
235, Taiwan
Web: www.itechate.com
TEL: +886-3-6684333
E-mail: info@itechate.com



ITECH Web



ITECH Facebook



ITECH LinkedIn